



Unless otherwise specified: Dimensions are in Millimeters		
Nominal size		
0.5 - 3.0:	± 0.05	Surface Finish:
3.0 - 6.0:	± 0.1	Radius:
6.0 - 30:	± 0.2	Corner:
30 - 120:	± 0.3	Liner:
120 - 315:	± 0.5	Angular: $\pm 2^\circ$
315 - 1000:	± 0.8	

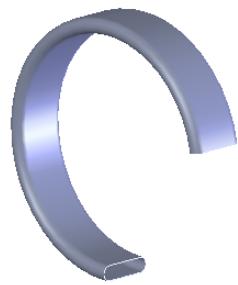

Debur and Break Sharp Edges

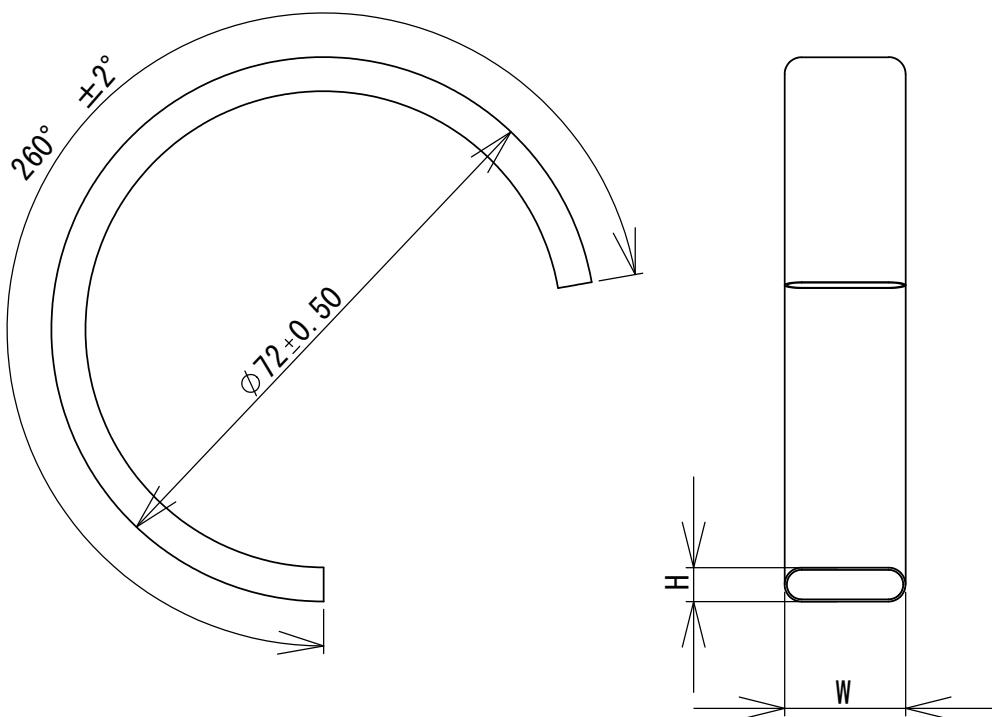

Scale (1:1)

Pressure Range (MPa)	Section Type	W	H	Tip Travel	Pressure Range (MPa)	Section Type	W	H	Tip Travel
		$\pm 0.30\text{mm}$	$\pm 0.30\text{mm}$	$\pm 0.25\text{mm}$			$\pm 0.30\text{mm}$	$\pm 0.30\text{mm}$	$\pm 0.25\text{mm}$
					0-1.0	C	16.3	4.5	4.8
					0-0.7	C	16.2	4.7	4.8
0-10.0	C	16.7	5.0	4.8	0-0.6	C	16.6	4.1	4.8
0-7.0	C	16.0	5.0	4.8	0-0.5	C	13.3	4.2	4.8
0-5.0	C	12.9	4.9	4.8	0-0.4	C	13.1	4.6	4.8
0-4.0	C	16.1	4.8	4.8	0-0.3	C	16.5	4.2	4.8
0-3.5	C	16.5	4.3	4.8	0-0.25	C	16.5	5.4	4.8
0-3.0	C	15.9	5.0	4.8	0-0.2	A	16.9	5.4	4.8
0-2.5	C	16.4	5.4	4.8	0-0.16	A	16.9	5.4	4.8
0-2.0	C	15.9	5.0	4.8	0-0.1	A	16.8	5.4	4.8
0-1.6	C	15.8	5.4	4.8	0-0.06	A	17.1	5.1	4.8

Parts Name:

C-Type Bourdon Tube 72 mm OD SS

Material:

SUS 316
AISI 316

Drawn:

Kaz Miyasaka

Date:

2004/11/26

Drawing No.
C72SS

Proprietary and Confidential

The information contained in this drawing is the sole property of Fuji Burudon MFG. Any reproduction in part or as a whole without the written permission of Fuji Burudon MFG. is prohibited.

FUJI BURUDON MFG CO LTD